

AirLine FC linear luminaire series offer simple and stylish illumination on different architectural structures with wide color options. They provide homogeneous image with custom made diffuser.

They can easily adapt to any type of architecture with external control capability.

Options

RGB
Red Green
Blue

RGBW
Red Green
Blue White

**Tunable
White**
2700K - 6500K

Control

External DMX512/RDM
External DALI
ON/OFF



General Specifications

- **With its aluminum extrusion body and UV-resistant diffuser**, it is designed to operate smoothly for many years under harsh environmental conditions.
- Animations can be displayed with external DMX512 controllers
- They provide visual harmony to architectural structures with **body color options**.



Technical Specifications

/ General

Control	External DMX512/RDM
Color Depth	16,7 Million

/ Physical

Size	(A*) x 39mm x 29mm
Body	Aluminium Extrusion
Connections	IP67 Connector
Working Temperature	-25°C ~ +50°C
Protection Class	IP67

* Product lengths may vary. For details, see the technical drawing section.

/ Optical

Luminous Flux	700lm*
Viewing Angle	120°


* Lumen value is given when all LEDs are at full power.

/ Electrical


Power	10 ~ 20W*
Operating Voltage	24VDC

* Power consumption may vary with product length and pixel structure.

Technical Drawing

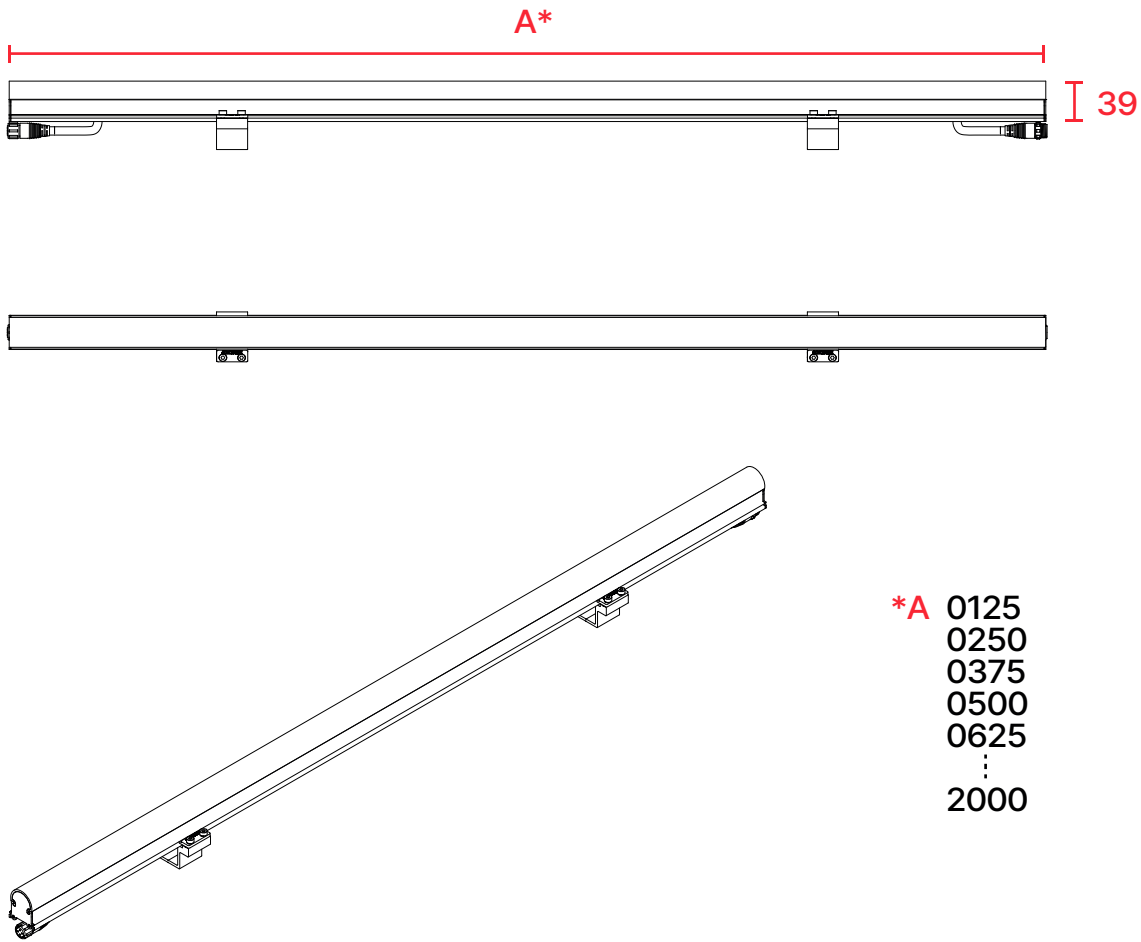

Options

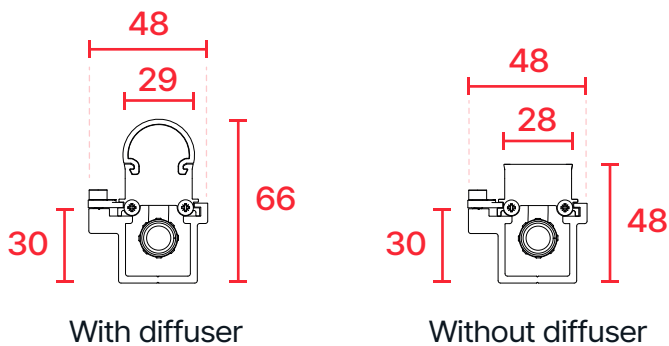

All dimensions are in millimeters

Accessories

Connection Accessories



Extension cable




Input cable


Mounting Accessories



Standard mounting bracket




U type mounting bracket



M4 Allen Key

Connection Diagram

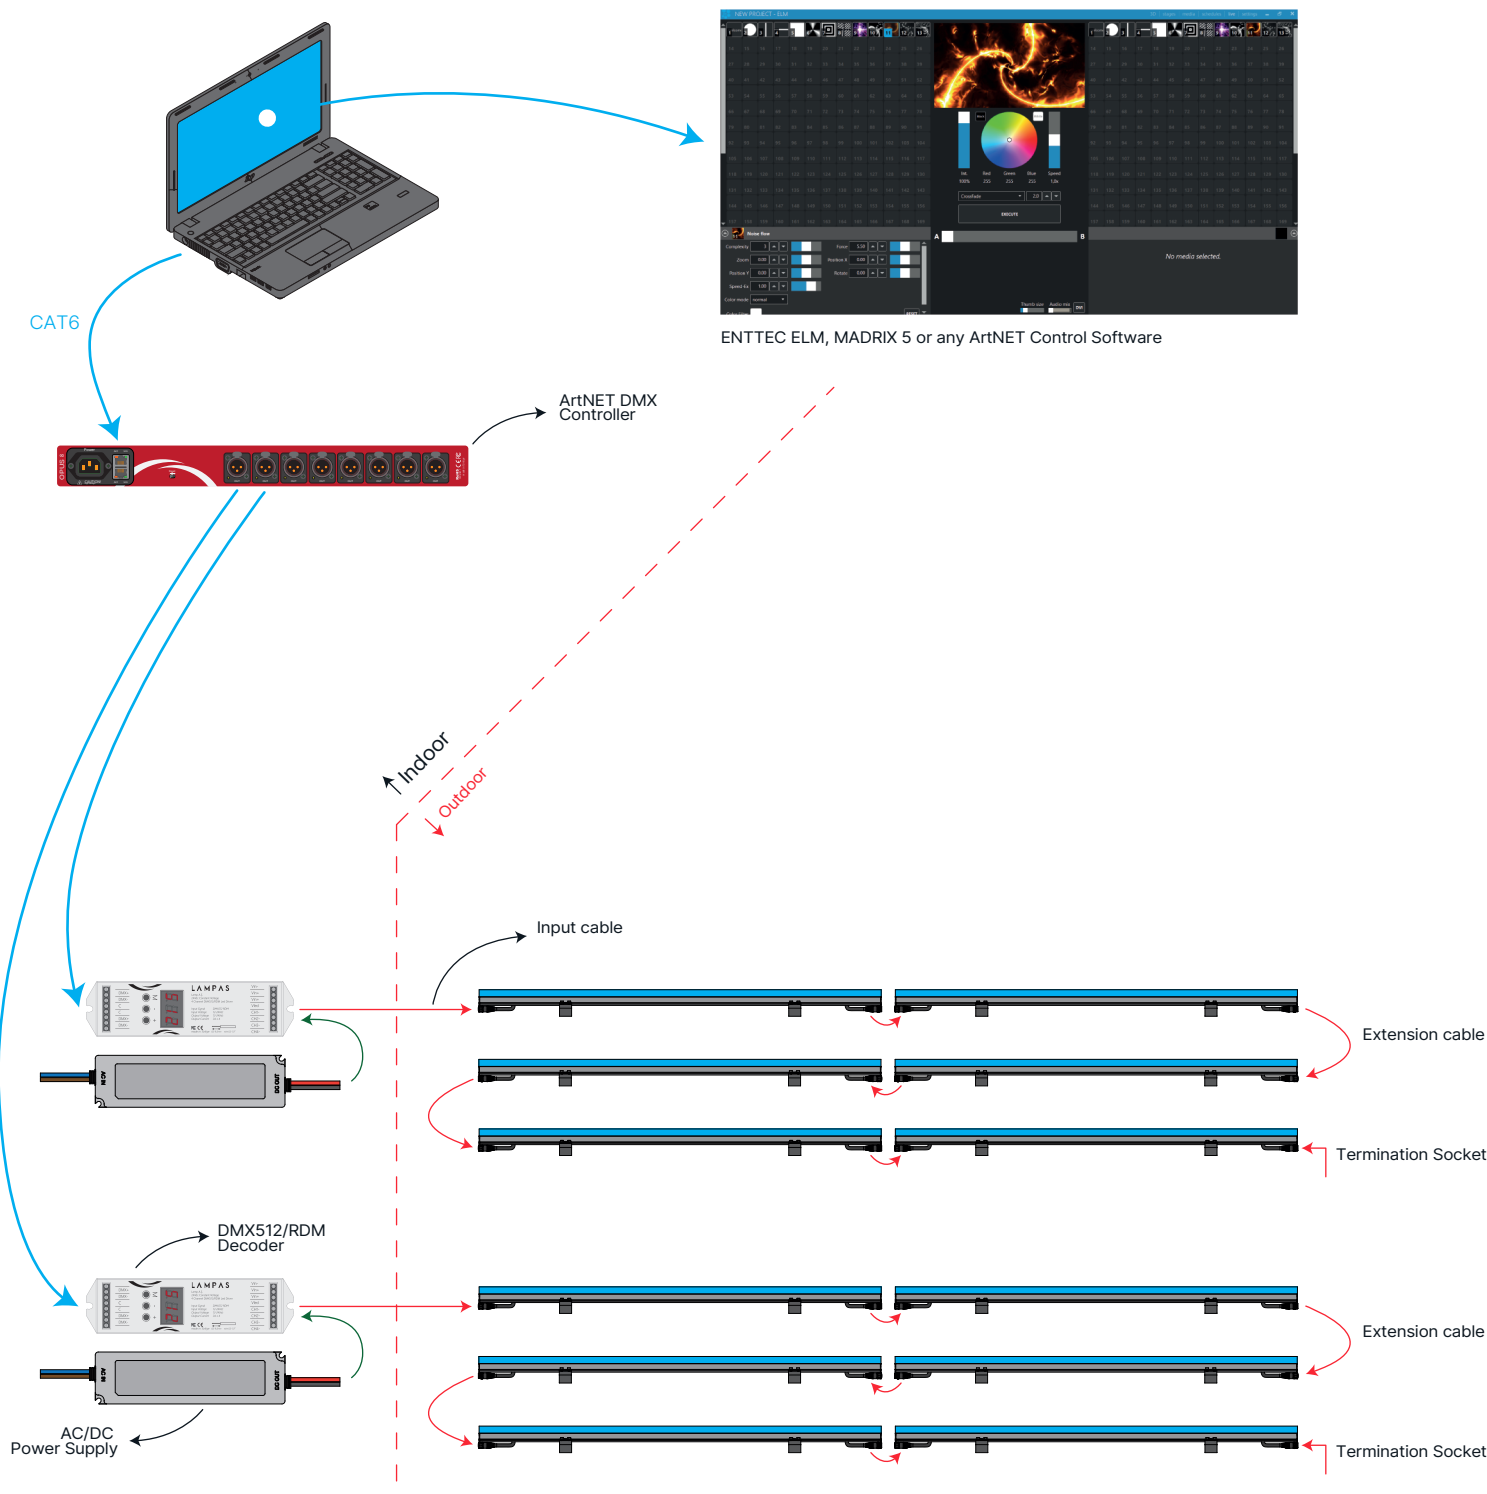

ENTTEC ELM, MADRIX 5 or any ArtNET Control Software