

AirLine MC linear luminaire series offer simple and stylish illumination on different architectural structures with wide color options. They provide homogeneous image with custom made diffuser.

Practical and simple architectural illumination can be achieved with this fixed color luminaire series.

Airline MC family is designed to operate hassle-free for many years under harsh environmental conditions.

### Options

CCT

2700K, 3000K  
4000K, 5000K  
6500K

### Control

External DMX512/RDM  
External DALI  
ON/OFF



---

# General Specifications

- With its aluminum **extrusion body and UV-resistant diffuser**, it is designed to operate smoothly for many years under harsh environmental conditions.
- With **IP67** protection class feature, they work flawlessly under harsh weather conditions.
- They provide visual harmony to architectural structures with **body color options**.
- Due to external **DMX512** protocol support, it provides full compatibility with external control software such as **Madrix 5, ENTTEC ELM**.



---

# Technical Specifications

## / General

Control	External DMX512/RDM
Color Depth	256

## / Physical

Size	(A*) x 39mm x 29mm
Body	Aluminium Extrusion
Connections	IP67 Connector
Working Temperature	-25°C ~ +50°C
Protection Class	IP67

\* Product lengths may vary. For details, see the technical drawing section.

## / Optical

Luminous Flux	1750lm*
Viewing Angle	120°


\* Lumen value is given when all LEDs are at full power.

## / Electrical


Power	10 ~ 20W*
Operating Voltage	24VDC

\* Power consumption may vary with product length and pixel structure.

# Technical Drawing

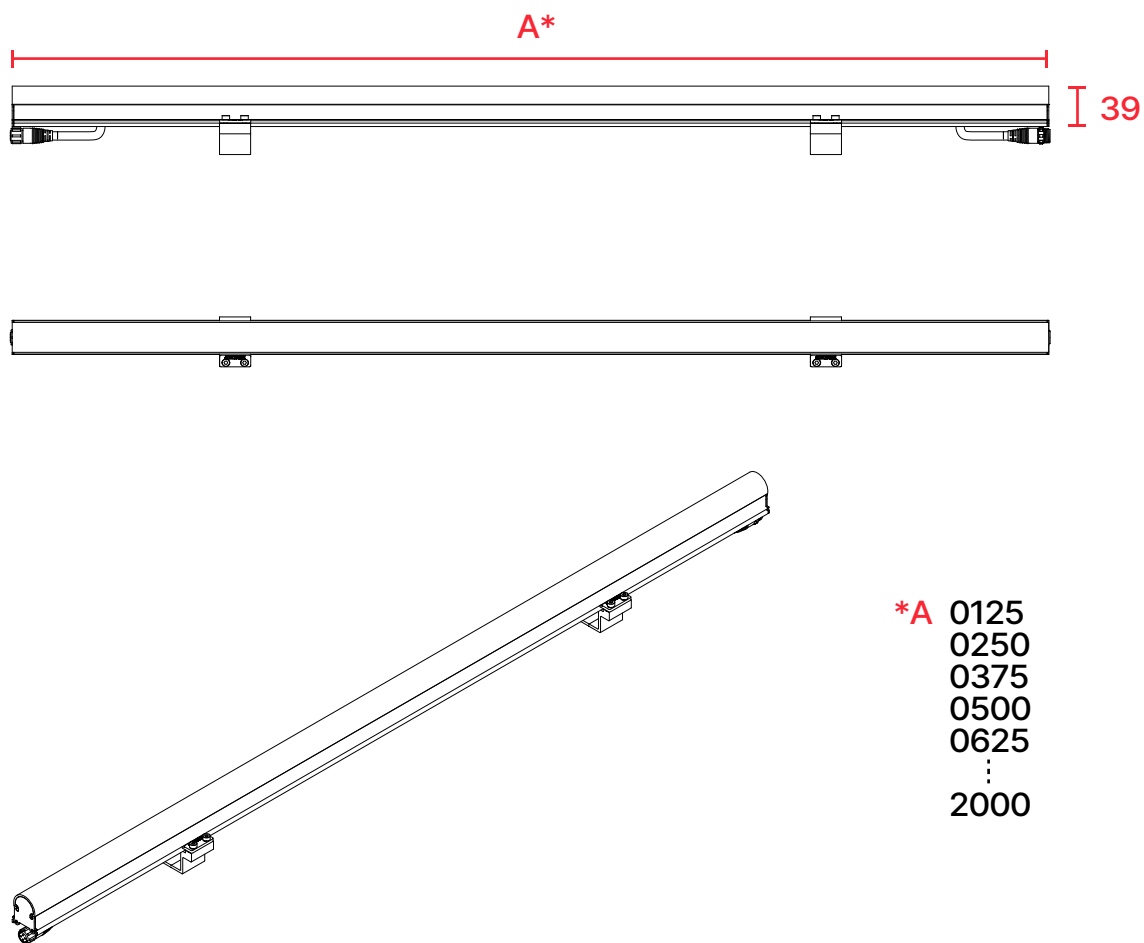

## Options

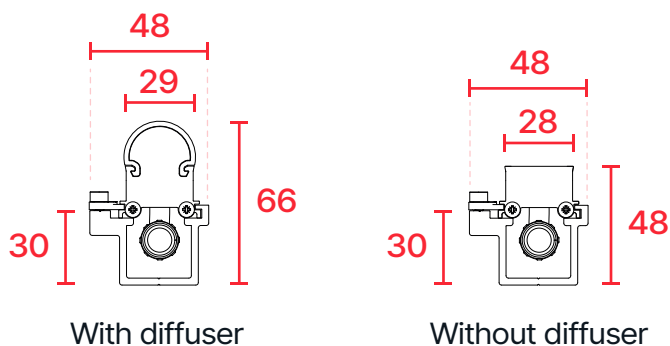

All dimensions are in millimeters

---

# Accessories

## Connection Accessories



Extension cable




input cable

---


## Mounting Accessories



Standard Mounting bracket



U type mounting bracket



M4 Allen key

# Connection Diagram

