

SlimLine MC

Datasheet

SlimLine MC linear luminaire series offer simple and stylish illumination on different architectural structures with wide color options. They provide homogeneous image with custom made diffuser.

Practical and simple architectural illumination can be achieved with this fixed color luminaire series.

SlimLine MC family is designed to operate hassle-free for many years under harsh environmental conditions.

Options

CCT

2700K, 3000K
4000K, 5000K
6500K

Control

External DMX512/RDM
External DALI
ON/OFF



General Specifications

- With its **aluminum extrusion body and UV-resistant diffuser**, it is designed to operate smoothly for many years under harsh environmental conditions.
- With **IP67** protection class feature, they work flawlessly under harsh weather conditions.
- They provide visual harmony to architectural structures with **body color options**.
- Due to external **DMX512** protocol support, it provides full compatibility with external control software such as **Madrix 5, ENTTEC ELM**.



Technical Specifications

/ General

Control	External DMX512/RDM
Color Depth	256

/ Physical

Size	(A*) x 18mm x 15mm
Body	Aluminium extrusion
Connections	IP67 Connector
Working Temperature	-25°C ~ +50°C
Protection Class	IP67

* Product lengths may vary. For details, see the technical drawing section.

/ Optical

Power	1250lm*
Operating Voltage	140°


* Lumen value is given when all LEDs are at full power.

/ Electrical


Power	10W*
Operating Voltage	24VDC

* Power consumption may vary with product length and pixel structure.

Technical Drawing

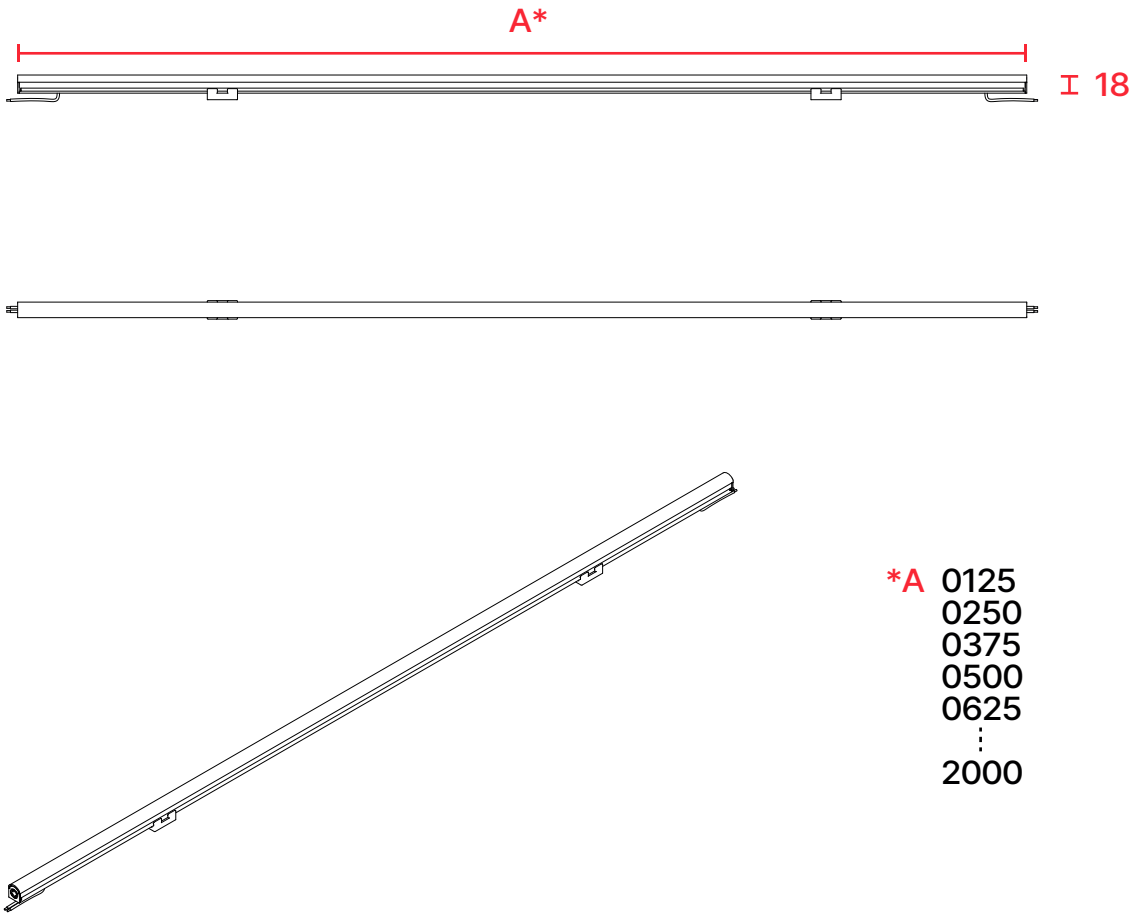

Options

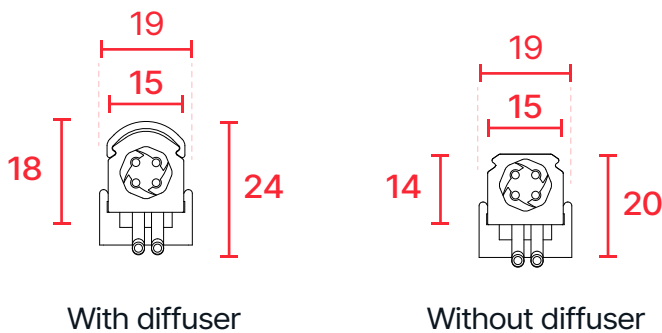

All dimensions are in millimeters

Accessories

Connection Accessories



Extension cable




input cable

Mounting Accessories



Standard mounting bracket



M4 Allen key

Connection Diagram

